

Stainless Steel-Levelling feet

Adjustable spindle

SPECIFICATION

Types

- Type **OS**: without plastic cap
- Type **KS**: with plastic cap, gliding
- Type **KR**: with plastic cap, non-gliding
- Type **KSE**: with plastic cap, gliding, electrically conductive (antistatic)
- Type **KRE**: with plastic cap, non-gliding, electrically conductive (antistatic)

Stainless Steel AISI 303

Type **KS / KSE**

Plastic cap Polyacetal (POM)

KS: white (natural colour) RAL 9001

KSE: black, electrically conductive

Surface resistivity: $< 10^6 \Omega$

Volume resistivity: $< 10^7 \Omega$

DIN EN 61340-5-1 / 61340-2-3

Type **KR / KRE**

Plastic cap Elastomer (TPE), 78 Shore A ≈

KR: black

KRE: black, electrically conductive

Surface resistivity: $< 10^6 \Omega$

Volume resistivity: $< 10^7 \Omega$

DIN EN 61340-5-1 / 61340-2-3

Hexagon nut ISO 4032

Stainless Steel AISI 304



INFORMATION


The static load of the Stainless Steel-Levelling feet GN GN 343.6 is limited by the load capacity of the ball joint / threaded stud (AISI 303).

The static load values (only valid for Type OS, KS and KSE) in the above table refer to a net vertical load in relation to the levelling foot. Under normal operating conditions side loading or angular loading is not uncommon and the load capacity would be considerably reduced which must be taken into consideration.

Stainless Steel-Levelling feet GN 343.6 cannot be disassembled.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- Elastomer characteristics (see page A32)
- Plastic characteristics (see page A2)

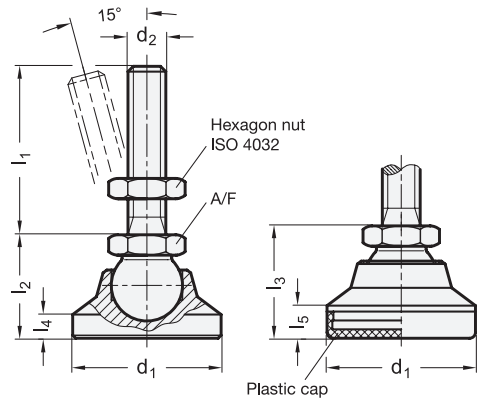

* Complete with type index of the Levelling feet

OS KS KR KSE KRE

GN 343.6

STAINLESS STEEL


Description	d1	d2	l1	l2	l3	l4	l5	A/F	Static load in kN	⚖
GN 343.6-25-M6-40-*	25	M 6	40	19	20.5	4	5.5	12	4	44
GN 343.6-25-M6-50-*	25	M 6	50	19	20.5	4	5.5	12	4	43
GN 343.6-25-M6-63-*	25	M 6	63	19	20.5	4	5.5	12	4	46
GN 343.6-25-M8-40-*	25	M 8	40	19	20.5	4	5.5	12	7	52
GN 343.6-25-M8-50-*	25	M 8	50	19	20.5	4	5.5	12	7	50
GN 343.6-25-M8-63-*	25	M 8	63	19	20.5	4	5.5	12	7	61
GN 343.6-25-M10-50-*	25	M 10	50	19	20.5	4	5.5	12	11	67

* Complete with type index of the Levelling feet

OS KS KR KSE KRE

GN 343.6

STAINLESS STEEL

Description	d1	d2	l1	l2	l3	l4	l5	A/F	Static load in kN	
GN 343.6-25-M10-63-*	25	M 10	63	19	20.5	4	5.5	12	11	73
GN 343.6-25-M10-80-*	25	M 10	80	19	20.5	4	5.5	12	11	81
GN 343.6-32-M8-40-*	32	M 8	40	23	24.5	5	6.5	12	7	60
GN 343.6-32-M8-50-*	32	M 8	50	23	24.5	5	6.5	12	7	80
GN 343.6-32-M8-63-*	32	M 8	63	23	24.5	5	6.5	12	7	80
GN 343.6-32-M10-50-*	32	M 10	50	23	24.5	5	6.5	15	11	107
GN 343.6-32-M10-63-*	32	M 10	63	23	24.5	5	6.5	15	11	97
GN 343.6-32-M10-80-*	32	M 10	80	23	24.5	5	6.5	15	11	116
GN 343.6-32-M12-63-*	32	M 12	63	23	24.5	5	6.5	15	16	125
GN 343.6-32-M12-80-*	32	M 12	80	23	24.5	5	6.5	15	16	137
GN 343.6-32-M12-100-*	32	M 12	100	23	24.5	5	6.5	15	16	152
GN 343.6-40-M8-50-*	40	M 8	50	26	27.5	6	7.5	15	7	129
GN 343.6-40-M8-63-*	40	M 8	63	26	27.5	6	7.5	15	7	134
GN 343.6-40-M8-80-*	40	M 8	80	26	27.5	6	7.5	15	7	139
GN 343.6-40-M10-50-*	40	M 10	50	26	27.5	6	7.5	15	11	140
GN 343.6-40-M10-63-*	40	M 10	63	26	27.5	6	7.5	15	11	150
GN 343.6-40-M10-80-*	40	M 10	80	26	27.5	6	7.5	15	11	160
GN 343.6-40-M12-63-*	40	M 12	63	26	27.5	6	7.5	17	16	173
GN 343.6-40-M12-80-*	40	M 12	80	26	27.5	6	7.5	17	16	180
GN 343.6-40-M12-100-*	40	M 12	100	26	27.5	6	7.5	17	16	202
GN 343.6-50-M8-50-*	50	M 8	50	26	29.5	7	8.5	15	7	198
GN 343.6-50-M8-63-*	50	M 8	63	26	29.5	7	8.5	15	7	200
GN 343.6-50-M8-80-*	50	M 8	80	26	29.5	7	8.5	15	7	207
GN 343.6-50-M10-50-*	50	M 10	50	28	29.5	7	8.5	15	11	200
GN 343.6-50-M10-63-*	50	M 10	63	28	29.5	7	8.5	15	11	200
GN 343.6-50-M10-80-*	50	M 10	80	28	29.5	7	8.5	15	11	220
GN 343.6-50-M12-63-*	50	M 12	63	28	29.5	7	8.5	17	16	245
GN 343.6-50-M12-80-*	50	M 12	80	28	29.5	7	8.5	17	16	240
GN 343.6-50-M12-100-*	50	M 12	100	28	29.5	7	8.5	17	16	220
GN 343.6-50-M16-63-*	50	M 16	63	28	29.5	7	8.5	17	30	290
GN 343.6-50-M16-80-*	50	M 16	80	28	29.5	7	8.5	17	30	314
GN 343.6-50-M16-100-*	50	M 16	100	28	29.5	7	8.5	17	30	338
GN 343.6-60-M10-50-*	60	M 10	50	36	37.5	8.5	10	17	11	370
GN 343.6-60-M10-63-*	60	M 10	63	36	37.5	8.5	10	17	11	375
GN 343.6-60-M10-80-*	60	M 10	80	36	37.5	8.5	10	17	11	384
GN 343.6-60-M12-63-*	60	M 12	63	36	37.5	8.5	10	17	16	400
GN 343.6-60-M12-80-*	60	M 12	80	36	37.5	8.5	10	17	16	400
GN 343.6-60-M12-100-*	60	M 12	100	36	37.5	8.5	10	17	16	400
GN 343.6-60-M16-80-*	60	M 16	80	36	37.5	8.5	10	24	30	470
GN 343.6-60-M16-100-*	60	M 16	100	36	37.5	8.5	10	24	30	480
GN 343.6-60-M16-125-*	60	M 16	125	36	37.5	8.5	10	24	30	524
GN 343.6-60-M20-98-*	60	M 20	98	36	37.5	8.5	10	24	45	550
GN 343.6-60-M20-138-*	60	M 20	138	36	37.5	8.5	10	24	45	660
GN 343.6-60-M20-158-*	60	M 20	158	36	37.5	8.5	10	24	45	700
GN 343.6-60-M24-98-*	60	M 24	98	36	37.5	8.5	10	24	45	712
GN 343.6-60-M24-138-*	60	M 24	138	36	37.5	8.5	10	24	45	800
GN 343.6-60-M24-158-*	60	M 24	158	36	37.5	8.5	10	24	45	900

Weight type KR

