
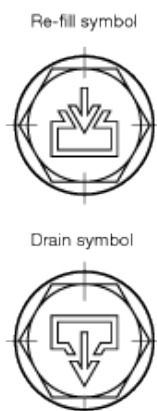


GN 741

Plugs

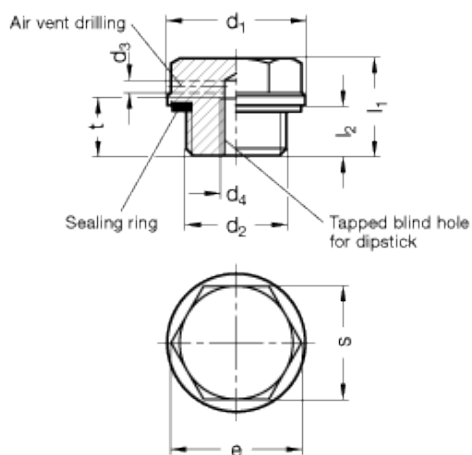

technical informations

Types

- Type OS: neutral, blank
- Type OSS: neutral, black anodized
- Type ES: with DIN re-fill symbol, blank
- Type ESS: with DIN re-fill symbol, black anodized
- Type AS: with DIN drain symbol, blank
- Type ASS: with DIN drain symbol, black anodized

Identification

- No. 1: without vent drilling
- No. 2: with vent drilling

Aluminium

- Type OS, ES and AS
fine turned, blank
- Type OSS, ESS, and ASS
fine turned, black anodized
- Symbols laser engraved

- temperature resistant up to 100 °C
- Sealing ring Rubbers NBR (Perbunan)

Information

Threaded plugs GN 741 are fitted with outside diameter d1 to suit screw holes with BSP threads to DIN 3852.

The sealing ring is bedded into a undercut groove which prevents it from dropping out and at the same time stops it from being extruded when tightening the cap.



On request

with dipstick

Standard Elements	Main dimensions									Weight
Description	d ₁	d ₂	d ₃	d ₄	l ₁	l ₂	t	s	e ≈	g
GN 741-19-M14x1.5-OS-*	19	M14x1.5	2	M5	15.5	8	8	15	17.3	7
GN 741-19-M14x1.5-OSS-*	19	M14x1.5	2	M5	15.5	8	8	15	17.3	7
GN 741-19-M14x1.5-ES-*	19	M14x1.5	2	M5	15.5	8	8	15	17.3	7
GN 741-19-M14x1.5-ESS-*	19	M14x1.5	2	M5	15.5	8	8	15	17.3	7
GN 741-19-M14x1.5-AS-*	19	M14x1.5	2	M5	15.5	8	8	15	17.3	7
GN 741-19-M14x1.5-ASS-*	19	M14x1.5	2	M5	15.5	8	8	15	17.3	7
GN 741-22-M16x1.5-OS-*	22	M16x1.5	2	M5	15.5	8	8	18	20.8	10
GN 741-22-M16x1.5-OSS	22	M16x1.5	2	M5	15.5	8	8	18	20.8	10
GN 741-22-M16x1.5-ES-*	22	M16x1.5	2	M5	15.5	8	8	18	20.8	10
GN 741-22-M16x1.5-ESS-*	22	M16x1.5	2	M5	15.5	8	8	18	20.8	10
GN 741-22-M16x1.5-AS-*	22	M16x1.5	2	M5	15.5	8	8	18	20.8	10
GN 741-22-M16x1.5-ASS-*	22	M16x1.5	2	M5	15.5	8	8	18	20.8	10
GN 741-26-M20x1.5-OS-*	26	M20x1.5	2	M5	16	8.5	8	21	24.3	15
GN 741-26-M20x1.5-OSS-*	26	M20x1.5	2	M5	16	8.5	8	21	24.3	15
GN 741-26-M20x1.5-ES-*	26	M20x1.5	2	M5	16	8.5	8	21	24.3	15
GN 741-26-M20x1.5-ESS-*	26	M20x1.5	2	M5	16	8.5	8	21	24.3	15
GN 741-26-M20x1.5-AS-*	26	M20x1.5	2	M5	16	8.5	8	21	24.3	15
GN 741-26-M20x1.5-ASS-*	26	M20x1.5	2	M5	16	8.5	8	21	24.3	15
GN 741-32-M26x1.5-OS-*	32	M26x1.5	2	M5	17	9	8	27	31.2	26
GN 741-32-M26x1.5-OSS-*	32	M26x1.5	2	M5	17	9	8	27	31.2	26
GN 741-32-M26x1.5-ES-*	32	M26x1.5	2	M5	17	9	8	27	31.2	26
GN 741-32-M26x1.5-ESS-*	32	M26x1.5	2	M5	17	9	8	27	31.2	26
GN 741-32-M26x1.5-AS-*	32	M26x1.5	2	M5	17	9	8	27	31.2	26
GN 741-32-M26x1.5-ASS-*	32	M26x1.5	2	M5	17	9	8	27	31.2	26
GN 741-32-M27x1.5-OS-*	32	M27x1.5	2	M5	17	9	8	27	31.2	35
GN 741-32-M27x1.5-OSS-*	32	M27x1.5	2	M5	17	9	8	27	31.2	35
GN 741-32-M27x1.5-ES-*	32	M27x1.5	2	M5	17	9	8	27	31.2	35
GN 741-32-M27x1.5-ESS-*	32	M27x1.5	2	M5	17	9	8	27	31.2	35
GN 741-32-M27x1.5-AS-*	32	M27x1.5	2	M5	17	9	8	27	31.2	35

GN 741-32-M27x1.5-ASS -*	32	M27x1.5	2	M5	17	9	8	27	31.2	35
GN 741-40-M33x1.5-OS-*	40	M33x1.5	2	M5	19.5	11	8	32	37	47
GN 741-40-M33x1.5-OSS -*	40	M33x1.5	2	M5	19.5	11	8	32	37	47
GN 741-40-M33x1.5-ES-*	40	M33x1.5	2	M5	19.5	11	8	32	37	47
GN 741-40-M33x1.5-ESS -*	40	M33x1.5	2	M5	19.5	11	8	32	37	47
GN 741-40-M33x1.5-AS-*	40	M33x1.5	2	M5	19.5	11	8	32	37	47
GN 741-40-M33x1.5-ASS -*	40	M33x1.5	2	M5	19.5	11	8	32	37	47
GN 741-50-M40x1.5-OS-*	50	M40x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M40x1.5-OSS-*	50	M40x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M40x1.5-ES-*	50	M40x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M40x1.5-ESS -*	50	M40x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M40x1.5-AS-*	50	M40x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M40x1.5-ASS -*	50	M40x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x1.5-OS-*	50	M42x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x1.5-OSS -*	50	M42x1.5	2	M5	521	12	8	41	47.3	80
GN 741-50-M42x1.5-ES-*	50	M42x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x1.5-ESS-*	50	M42x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x1.5-AS-*	50	M42x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x1.5-ASS -*	50	M42x1.5	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x2-OS-*	50	M42x2	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x2-OSS -*	50	M42x2	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x2-ES-*	50	M42x2	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x2-ESS-*	50	M42x2	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x2-AS-*	50	M42x2	2	M5	21	12	8	41	47.3	80
GN 741-50-M42x2-ASS -*	50	M42x2	2	M5	21	12	8	41	47.3	80
GN 741-19-G1/4-OS-*	19	G1/4	2	M5	15.5	8	8	15	17.3	7
GN 741-19-G1/4-OSS -*	19	G1/4	2	M5	15.5	8	8	15	17.3	7
GN 741-19-G1/4-ES-*	19	G1/4	2	M5	15.5	8	8	15	17.3	7
GN 741-19-G1/4-ESS -*	19	G1/4	2	M5	15.5	8	8	15	17.3	7
GN 741-19-G1/4-AS-*	19	G1/4	2	M5	15.5	8	8	15	17.3	7
GN 741-19-G1/4-ASS -*	19	G1/4	2	M5	15.5	8	8	15	17.3	7
GN 741-22-G3/8-OS-*	22	G3/8	2	M5	15.5	8	8	18	20.8	10
GN 741-22-G3/8-OSS -*	22	G3/8	2	M5	15.5	8	8	18	20.8	10
GN 741-22-G3/8-ES-*	22	G3/8	2	M5	15.5	8	8	18	20.8	10
GN 741-22-G3/8-ESS -*	22	G3/8	2	M5	15.5	8	8	18	20.8	10
GN 741-22-G3/8-AS-*	22	G3/8	2	M5	15.5	8	8	18	20.8	10
GN 741-22-G3/8-ASS -*	22	G3/8	2	M5	15.5	8	8	18	20.8	10
GN 741-26-G1/2-OS-*	26	G1/2	2	M5	16	8.5	8	21	24.3	15
GN 741-26-G1/2-OSS -*	26	G1/2	2	M5	16	8.5	8	21	24.3	15
GN 741-26-G1/2-ES-*	26	G1/2	2	M5	16	8.5	8	21	24.3	15
GN 741-26-G1/2-ESS -*	26	G1/2	2	M5	16	8.5	8	21	24.3	15
GN 741-26-G1/2-AS-*	26	G1/2	2	M5	16	8.5	8	21	24.3	15
GN 741-26-G1/2-ASS -*	26	G1/2	2	M5	16	8.5	8	21	24.3	15
GN 741-32-G3/4-OS-*	32	G3/4	2	M5	17	9	8	27	31.2	26
GN 741-32-G3/4-OSS-*	32	G3/4	2	M5	17	9	8	27	31.2	26

GN 741-32-G3/4-ES-*	32	G3/4	2	M5	17	9	8	27	31.2	26
GN 741-32-G3/4-ESS -*	32	G3/4	2	M5	17	9	8	27	31.2	26
GN 741-32-G3/4-AS-*	32	G3/4	2	M5	17	9	8	27	31.2	26
GN 741-32-G3/4-ASS -*	32	G3/4	2	M5	17	9	8	27	31.2	26
GN 741-40-G1-OS-*	40	G1	2	M5	19.5	11	8	32	37	47
GN 741-40-G1-OSS -*	40	G1	2	M5	19.5	11	8	32	37	47
GN 741-40-G1-ES-*	40	G1	2	M5	19.5	11	8	32	37	47
GN 741-40-G1-ESS -*	40	G1	2	M5	19.5	11	8	32	37	47
GN 741-40-G1-AS-*	40	G1	2	M5	19.5	11	8	32	37	47
GN 741-40-G1-ASS -*	40	G1	2	M5	19.5	11	8	32	37	47
GN 741-50-G1 1/4-OS-*	50	G1 1/4	2	M5	21	12	8	41	47.3	80
GN 741-50-G1 1/4-OSS -*	50	G1 1/4	2	M5	21	12	8	41	47.3	80
GN 741-50-G1 1/4-ES-*	50	G1 1/4	2	M5	21	12	8	41	47.3	80
GN 741-50-G1 1/4-ESS -*	50	G1 1/4	2	M5	21	12	8	41	47.3	80
GN 741-50-G1 1/4-AS-*	50	G1 1/4	2	M5	21	12	8	41	47.3	80
GN 741-50-G1 1/4-ASS -*	50	G1 1/4	2	M5	21	12	8	41	47.3	80
GN 741-60-G1 1/2-OS-*	60	G1 1/2	2	M5	22	13	8	50	57.7	120
GN 741-60-G1 1/2-OSS -*	60	G1 1/2	2	M5	22	13	8	50	57.7	120
GN 741-60-G1 1/2-ES-*	60	G1 1/2	2	M5	22	13	8	50	57.7	120
GN 741-60-G1 1/2-ESS -*	60	G1 1/2	2	M5	22	13	8	50	57.7	120
GN 741-60-G1 1/2-AS-*	60	G1 1/2	2	M5	22	13	8	50	57.7	120
GN 741-60-G1 1/2-ASS -*	60	G1 1/2	2	M5	22	13	8	50	57.7	120

*Complete the description of the standard item needed by adding 1 (without vent drilling) or 2 (with vent drilling).



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE