


P/N	MATERIAL	COLOR
WITBH-50R	NYLON 6/6, UL94 V-2 (RMS-01)	NATURAL
WITBH-50R-HS	HEAT STABILIZED NYLON 6/6, UL94 V-2 (RMS-47)	BLACK

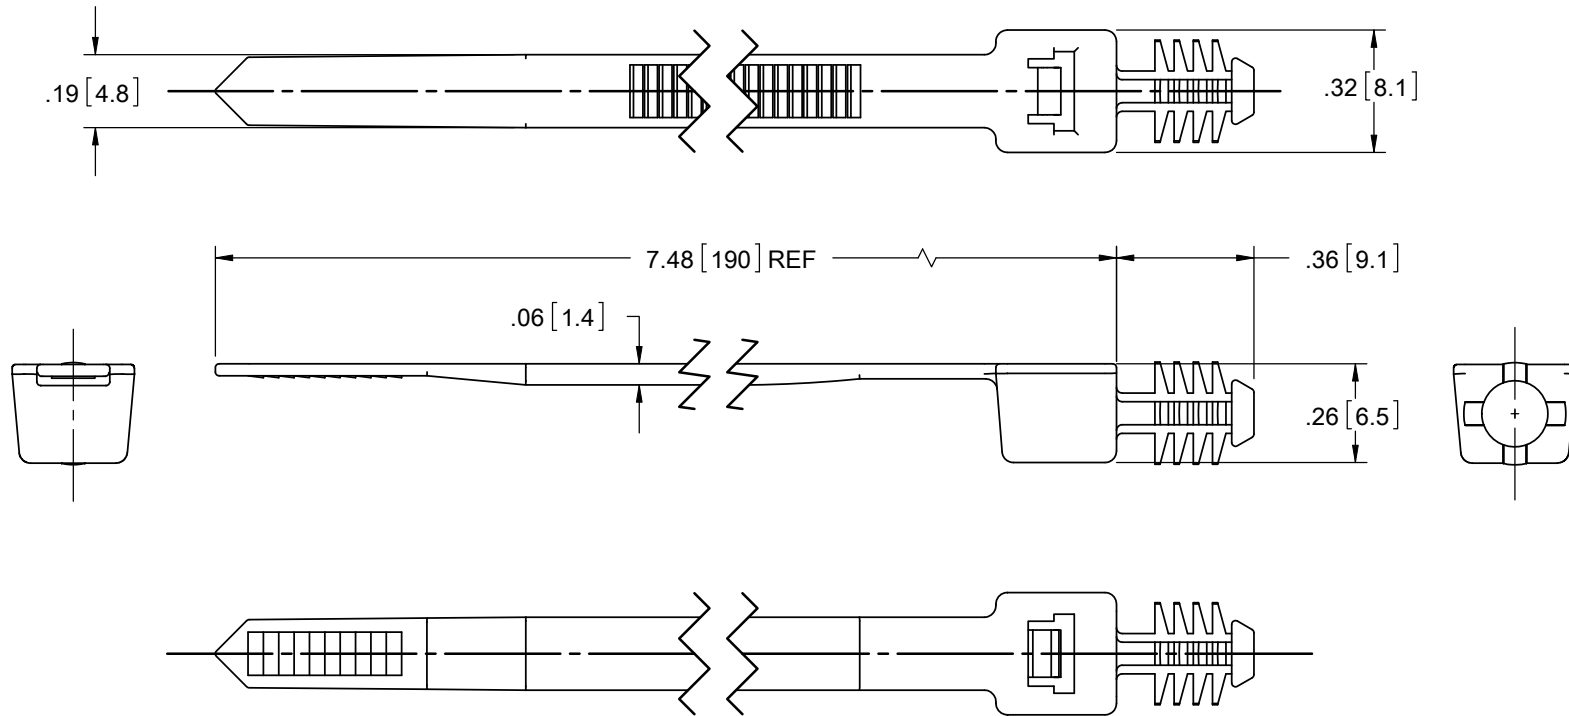

**NOTES:**

1. TO PRESS-FIT INTO A  $\varnothing.250 \pm .003$  (6.35 $\pm$ .08) HOLE IN A .25 (6.35) MIN. THICK PANEL
2. MAXIMUM BUNDLE DIAMETER: 1.75 IN [44.5 MM]
3. MAXIMUM TENSILE STRENGTH: 50 LBS [22 KG]

REV.	DESCRIPTION	ENGR.	DATE
B	SEE CO# 200286 FOR CHANGES	SK	11/25/08
A	RELEASED FOR PRODUCTION	SK	10/11/07

TITLE: WIT-50 WITH BLIND HOLE FIX				DWG IN IN [MM]		PRINT TYPE	
CREATED USING SOLIDWORKS	FILE #: WITBH-50	DWN: D.J.Z.	APP: D.J.Z.	FINAL			
TOLERANCES UNLESS NOTED .XX=±.01 .XXX=±.005 .XXXX=±.0020 ANG.=±1°	SHEET: 1 OF 1	SHEET SIZE: A	DT: 08/01/2007	CHKD: SJ	PART #	WITBH-50R	
	RE: RICHCO INC.		RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060			CA	