
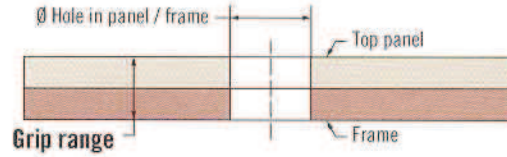


# 30 Push Rivet

## Push style



- Easy to install or remove
- Non-conductive, non-corrosive materials

**Material and Finish**  
Nylon, black or white

D Rivet Shell Ø	Ø Hole in panel / frame	J Head Ø Max.	Grip Range	G	K Head Thickness	L Shaft Length (Min.)	Shaft Slots
3	3.05	6.5	1.0 - 2.0	015	2.0 Max.	3.5	2
			2.0 - 3.0	025		4.5	2
			3.0 - 4.0	035		5.5	2
			4.0 - 5.0	045		6.5	2
			5.0 - 6.0	055		8.0	2
4	4.05	8.0	1.5 - 2.5	020	2.0 Max.	4.5	4
			2.5 - 3.5	030		5.5	4
			3.5 - 4.5	040		6.5	4
			4.5 - 5.5	050		7.5	4
			5.5 - 6.5	060		8.5	4
5	5.05	9.0	1.5 - 2.5	020	2.0 Max.	4.5	5
			2.5 - 3.5	030		5.5	5
			3.5 - 4.5	040		6.5	5
			4.5 - 5.5	050		7.5	5
			5.5 - 6.5	060		8.5	5
			6.5 - 7.5	070		9.5	5
			7.5 - 8.5	080		10.5	5
6	6.05	11.0	1.5 - 2.5	020	3.0 Max.	4.5	5
			2.5 - 3.5	030		5.5	5
			3.5 - 4.5	040		6.5	5
			4.5 - 5.5	050		7.5	5
			5.5 - 6.5	060		8.5	5
			6.5 - 7.5	070		9.5	5
			7.5 - 8.5	080		10.5	5

### Part Number Selection

