


57 Compression Latch

Self-adjusting · Spring latch series

- Four sizes available
- Three hole installation
- Accommodates grip variances

Material and Finish

Steel, zinc plated or stainless steel

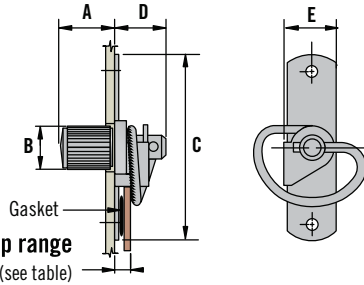


G Grip range
(see table)

Size	A	B	C	D	E
Miniature	11.9 (.47) Max.	13.5 (.53) Max.	27 (1.06)	7.5 (.03)	8.5 (.33)
Small	15.1 (.59) Max.	14.7 (.58) Max.	39.7 (1.56)	11.1 (.44)	11.6 (.46)
Medium	19.1 (.75) Max.	24.1 (.95) Max.	58.7 (2.31)	17.5 (.69)	17.5 (.69)
Large	26.2 (1.03) Max.	28.2 (1.11) Max.	88.9 (3.5)	25 (.98)	26.2 (1.03)


Nylon knob



Knurled



T-bar



Slot



Hex recess



Tool recess



57 Series

Size	G Grip Range		Knurled	Slotted	Nylon Knob
	Min.	Max.			
Mini	1.2 (.05)	4.3 (.17)	57-20-201-10	57-20-101-10	57-20-401-10
Small	1.2 (.05)	6.4 (.25)	57-30-201-10	57-30-101-10	57-30-401-10
Medium	1.6 (.06)	9.5 (.38)	57-10-201-10	57-10-101-10	57-10-401-10
Medium (stainless)	1.6 (.06)	9.5 (.38)	57-10-201-40	57-10-101-40	~
Large	2.4 (.09)	14.3 (.56)	~	57-40-101-10	57-40-401-10

Other options available. For complete details on variety, part numbers, installation and specification, go to

www.southco.com/57



Dimensions in millimeters (inch) unless otherwise stated