



D9 - *DZUS*® Tech Line Quick Access Fasteners

D9-PR PCI Riser Cage Fastener Assembly

- Designed for 2U Servers
- Hand operation
- Spring ejected
- Wide variety of receptacle options

Fastener Assembly Material and Finish

Cap: UL94-V0 PA6
 Assembly Cover: PC-ABS, black
 Pin, Washer: Stainless steel,
 passivate Lower Stud, Bracket, Clip:
 Steel, zinc plate Rotation Limiter,
 Upper Stud: Zinc alloy, chromate
 sealer

Installation Notes

Maximum installation torque
 of mounting screws to attach
 assembly covers
 0.7 Nm (6 in-lbs) using M3 screws.

Performance Details

Maximum torque to be applied to
 cap is 1.1 Nm (10 in-lbs)

Part Numbers



See tables

Receptacle Details


(order separately)

See page 471

Fastener Assembly

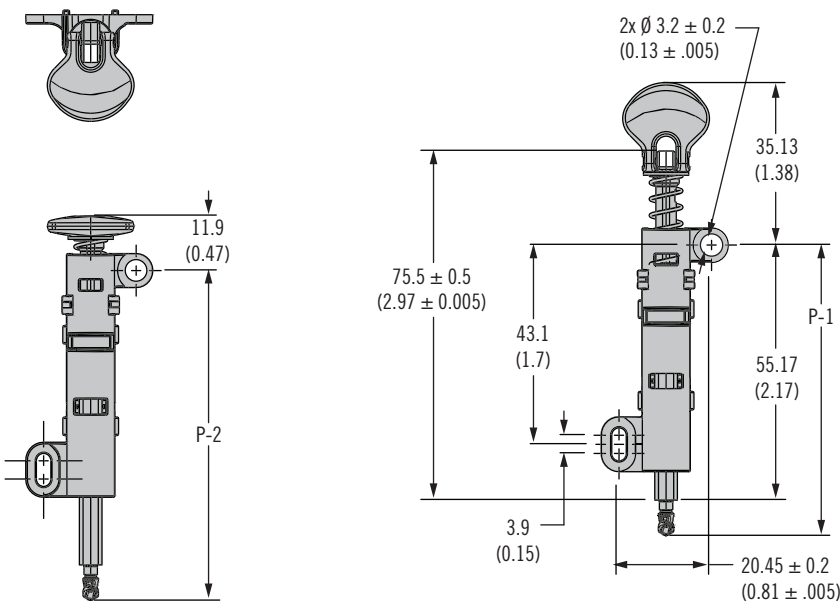

Fastened



Unfastened

To fasten, push on cap to place lower stud into receptacle and turn cap 180° and fold down.

Part Number	TMT	P-1	P-2	Cap Color
D9-PR-20-000	4.25 (0.16)	62.4 ± 1.2 (2.45 ± 0.04)	70.9 ± 1.2 (2.78 ± 0.04)	Black
D9-PR-20-072				Blue
D9-PR-21-000	4.45 (0.17)	62.6 ± 1.2 (2.46 ± 0.04)	71.1 ± 1.2 (2.79 ± 0.04)	Black
D9-PR-21-072				Blue
D9-PR-22-000	4.65 (0.18)	62.8 ± 1.2 (2.47 ± 0.04)	71.3 ± 1.2 (2.80 ± 0.04)	Black
D9-PR-22-072				Blue

TMT = Customer panel thickness + Customer PCB thickness + Southco receptacle
 thickness + Southco gasket compressed thickness (0.55 mm)


Gasket

Part Number	Material	Color
D9-81 (order separately)	High density foam	Gray


Pressure sensitive adhesive on one side

D9 - *DZUS*® Tech Line Quick Access Fasteners



D9-PR PCI Riser Cage Fastener Assembly

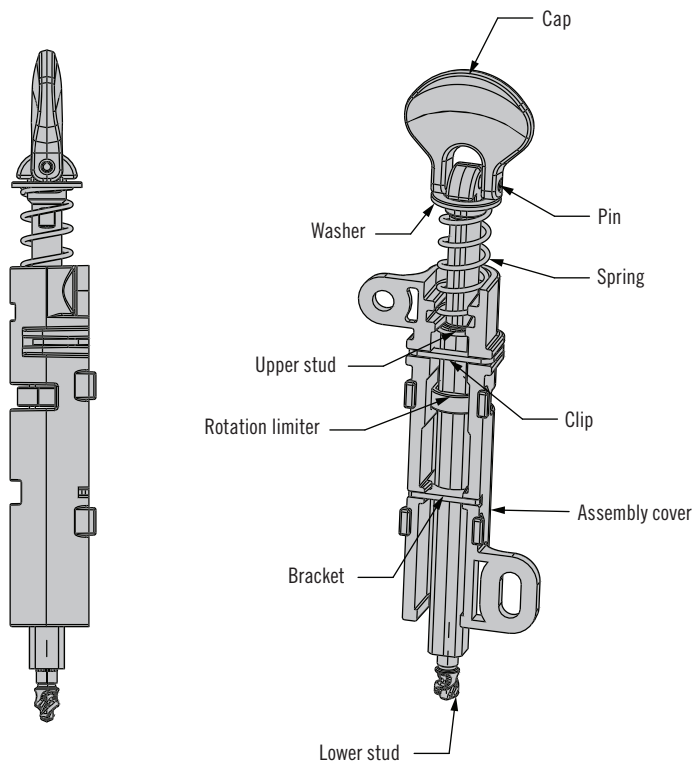

Panel Preparation

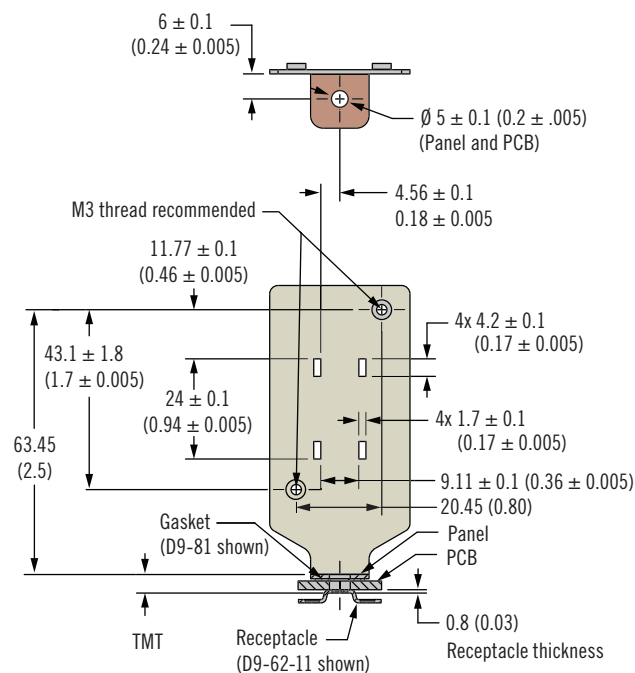

REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
B	19OCT2022	DL/ED	PRN:P2022-1850

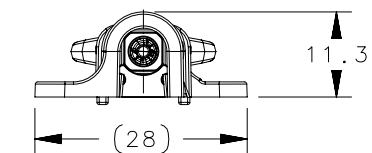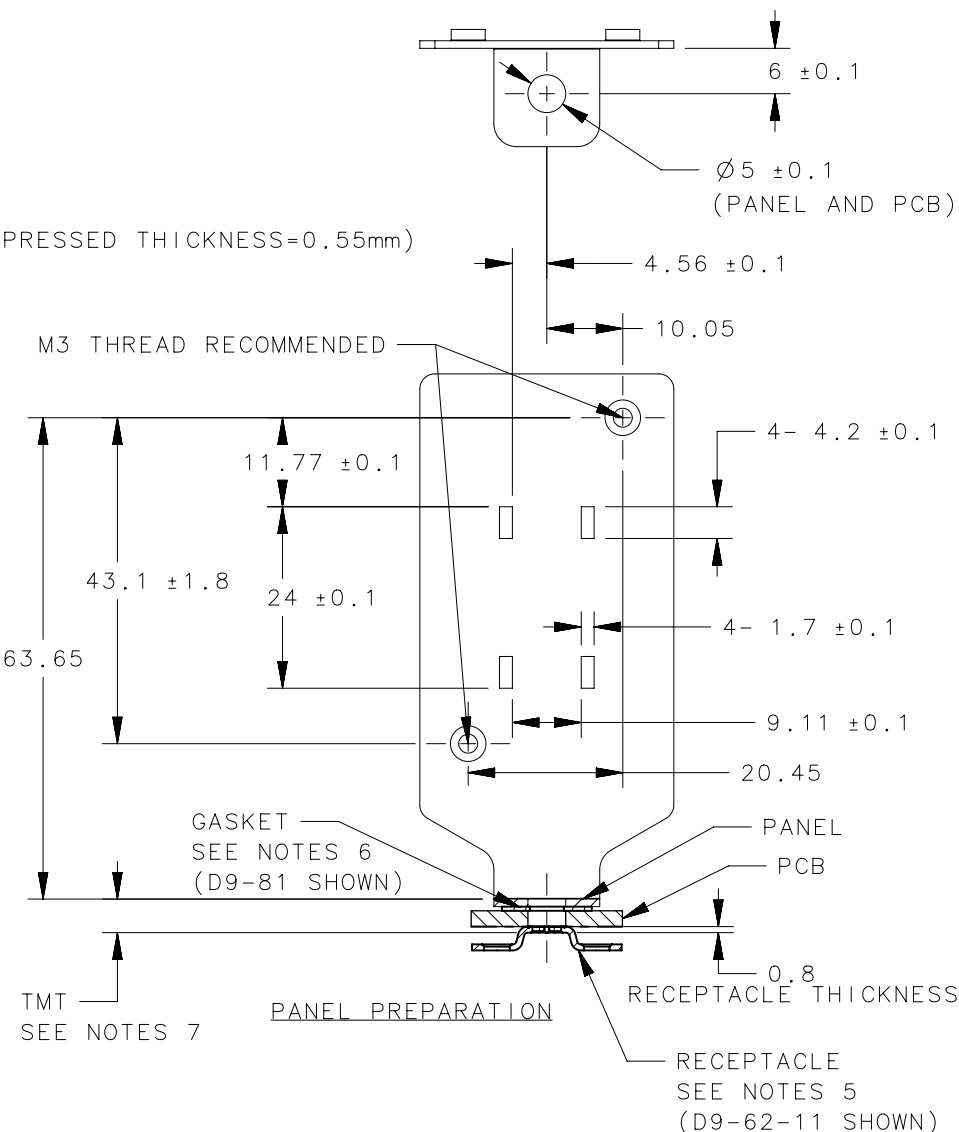

ASSEMBLY PART NUMBER	"EEE" CAP COLOR	TMT	P-1	P-2
D9-PR-20-EEE	000=BLACK , 072=BLUE FOR ADDITIONAL COLORS SEE J-47-0-3	4.25	62.4+/-1.2	70.9+/-1.2
D9-PR-21-EEE		4.45	62.6+/-1.2	71.1+/-1.2
D9-PR-22-EEE		4.65	62.8+/-1.2	71.3+/-1.2

WASHER	STAINLESS STEEL	PASSIVATE
ROTATION LIMITER	ZAMAK 3	CHROMATE SEALER
CAP	UL94-V0 PA6	PANTONE 279C
ASSEMBLY COVER	PC-ABS	BLACK
SPRING	MUSIC WIRE	ZINC PLATE
LOWER STUD	STEEL	ZINC PLATE
UPPER STUD	ZAMAK 3	CHROMATE SEALER
BRACKET	STEEL	NATURAL
PIN	STAINLESS STEEL	PASSIVATE
CLIP	STEEL	ZINC PLATE
TYPE OF COMPONENT	MATERIAL	FINISH/COLOR

PROPRIETARY ITEM
EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

THIRD ANGLE PROJECTION	
MILLIMETERS [IN]	
TOLERANCES UNLESS OTHERWISE NOTED	
ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.	
PER ASME Y14.5M-1994	

D9-PR		PCI RISER ASSEMBLY	
PART NUMBER		TYPE OF COMPONENT	
			
DESCRIPTION			
QUICK ACCESS FASTENER PCI LOCKDOWN ASSEMBLY			
SIZE A3	SYSTEM NX	DWG NO. J-D9-PR	
DRAWN BY DL		DATE 21DEC2020	SCALE 1:1
		SHEET 1 OF 1	


SOUTHCO PERFORMANCE GUIDELINES

THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE,ARE SUPPLIED AS A GENERAL GUIDE ONLY AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

REVISION HISTORY


REV	DATE	BY	DESCRIPTION
A	29SEP2022	DL/ED	PRN: P2022-1850

TORQUE FOR KNOB




D9-62-11


PUSH OUT FOR PIN

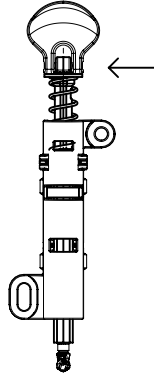

PUSH FOR KNOB IN LOCK



PULL OUT FOR STUD

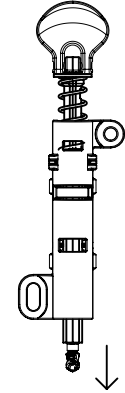

- ① MAXIMUM TORQUE: 1.1N.m
① AVERAGE ULTIMATE TORQUE: 1.6N.m
- ② MAXIMUM LOAD : 75N
② AVERAGE ULTIMATE LOAD: 120N
- ③ MAXIMUM LOAD : 90N
③ AVERAGE ULTIMATE LOAD: 180N
- ④ MAXIMUM LOAD: 160N
④ AVERAGE ULTIMATE LOAD: 290N

NOTES:

MAXIMUM TORQUE/LOAD - THE HIGHEST RECOMMENDED TORQUE/FORCE

AVERAGE ULTIMATE TORQUE - THE AVERAGE FORCE THAT CAUSES FAILURE OR EXCESSIVE DEFORMATION WHICH RENDERS THE PRODUCT INOPERABLE

AVERAGE ULTIMATE LOAD - THE AVERAGE FORCE THAT CAUSES FAILURE OR EXCESSIVE DEFORMATION WHICH RENDERS THE PRODUCT INOPERABLE

CPB NUMBER 2020-0513	THIRD ANGLE PROJECTION	 CONNECT • CREATE • INNOVATE			
	MILLIMETERS [IN]				
SURFACE AREA	TOLERANCES UNLESS OTHERWISE NOTED	DESCRIPTION QUICK ACCESS FASTENER			
VOLUME	UP TO 0.5 ±0.05 OVER 0.5 UP TO 6 ±0.1 OVER 6 UP TO 30 ±0.2 OVER 30 ±0.3 ANGLES ±1°				
PROPRIETARY ITEM EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.	PER ASME Y14.5M-1994	SIZE A4	SYSTEM NX	DWG NO. TD-D9-PR-J	
		DRAWN BY DL	DATE 04MAR2021	SCALE 1:2	SHEET 1 OF 1

REF: trD9-51398