

## Cabinet U-handles

Aluminium

### SPECIFICATION

Aluminium **AL**

plastic coated

black, RAL 9005, textured finish **SW**

silver, RAL 9006, textured finish **SR**

black, RAL 9005, antibacterial **SMA**

white, RAL 9016, antibacterial **WSA**

blank, tumbled **BL**

### INFORMATION

GN 426 cabinet U-handles are made from a bent aluminum profile and have excellent stability and ergonomic design. Due to the production process, special designs can be supplied even in relatively small quantities.



In addition to the standard surfaces, these cabinet U-handles are also available with a functional coating.

The **SMA / WSA** versions have a powder coating based on zinc molybdate, which gives it antibacterial properties. The principle of action, which is activated by the presence of moisture, demonstrably reduces the growth of bacteria within 24 hours, so that contaminated surfaces ultimately have less than 0.2% of the original number of microbes.

Standard elements with antibacterial plastic coating are primarily used in the health care sector and in public buildings, such as airports, train stations, stadiums, etc.

### TECHNICAL INFORMATION

- Load rating information (see page A35)

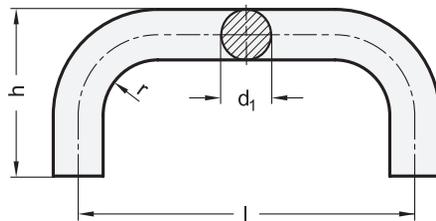

\* Complete with colour index of the Cabinet U-handles (SW, SR, SMA, WSA or BL)

<b>SW</b>	<b>SR</b>	<b>SMA</b>	<b>WSA</b>	<b>BL</b>
RAL 9005	RAL 9006	RAL 9005, antibacterial	RAL 9016, antibacterial	blank

### GN 426

Description	d1	l ±0.25	d2	h	r	t min.	Δ
GN 426-AL-20-200-*	20	200**	M 8	68	22	15	240
GN 426-AL-20-250-*	20	250**	M 8	68	22	15	280
GN 426-AL-20-300-*	20	300**	M 8	68	22	15	330
GN 426-AL-20-350-*	20	350	M 8	68	22	15	375
GN 426-AL-28-250-*	28	250**	M 10	78	32	15	290
GN 426-AL-28-300-*	28	300**	M 10	78	32	15	350
GN 426-AL-28-350-*	28	350	M 10	78	32	15	375
GN 426-AL-28-400-*	28	400**	M 10	78	32	15	415

\*\* Sizes also available for type WSA and SMA